Finding the edges is not enough: an evaluation of edge-function recovery in sparse additive-noise DAG learners

[Author list to be completed by the authors]

Preprint, draft of November 3, 2026

Abstract

Nonlinear additive-noise DAG learners are valued because every edge is an inspectable function, yet benchmarks score only whether the edges are found. We evaluate the recovered edge functions against ground truth in simulation, using an edge-function error (NRMSE), an interventional-effect error and calibration measures. A screened, group-lasso spline learner (SPADE-scaled) recovers structure almost perfectly on internally standardised data (AUROC 0.997–0.999 for $d = 100$ to 500), but its edge curves keep a median of about 44% of the true amplitude in the main cell and 14–46% across cells (edge-function NRMSE 0.61–0.80) and the interventional-effect curves derived from them are wrong even for direct parents (NRMSE 0.58–0.76). On fresh seeds (75 datasets, eight cells, $d = 100$ and 200) we compare three repairs: an unpenalised refit on the selected support (NRMSE 0.20–0.47), the standard adaptive group lasso (0.24–0.52, structure unchanged, AUROC 0.998), and BASIL-W, a Bayesian model-averaged estimator warm-started from the learner's causal order (0.15–0.29, lower than SPADE-scaled in all 75 datasets). The adaptive group lasso closes about 85% of the gap between SPADE-scaled and BASIL-W at no structural cost. BASIL-W is clearly better than the refit only under non-uniform noise, supplies calibrated edge probabilities, but costs 0.006–0.032 AUROC, its 90% credible bands cover only 74–81% of the truth, and on the real Sachs data no repair improves structure while the refit and BASIL-W are much less stable than SPADE-scaled because edges flip in and out of the selected set. None of the repair ingredients is new; our contribution is the measurement, the metrics, the pre-registered paired comparison and the negative results.

Keywords. causal discovery; additive noise models; edge functions; group lasso; Bayesian order MCMC; evaluation.

1 Introduction

Differentiable learners for nonlinear additive-noise structural equation models (ANMs) are often motivated by interpretability: each edge $c \to e$ is a univariate function f_{ce} that a practitioner can plot, and the shape (saturating, threshold-like, non-monotone) is meant to carry information beyond the presence of the edge (Agarwal et al., 2021; Liu et al., 2025; Dang et al., n.d.). Published evaluations of such learners, and of nonlinear DAG learners in general, report structure metrics (SHD, SID, AUROC) (Zheng et al., 2020; Lachapelle et al., 2020; Rolland et al., 2022; Montagna et al., 2023c). Whether the returned functions are *correct* is rarely scored, although a sparsity-inducing group penalty is known to bias the amplitude of the selected components towards zero (Huang et al., 2010; Belloni and Chernozhukov, 2013).

This paper asks a narrow question in a controlled setting: when a sparse spline additive DAG learner finds the edges, how accurate are the functions it returns, how much does that matter for the interventional effects a user would read off the model, and which fixes work? We answer it by simulation with ground-truth edge functions at $d = 100$ to 500, by a pre-registered paired comparison of repair strategies on fresh seeds, and by a real-data check on the Sachs protein-signalling data where function ground truth does not exist.

Framing. This is an *evaluation study*. It does not propose a new estimator. One of the estimators we compare (BASIL-W) was developed by us in the course of the project; we report it as one candidate among several and disclose that its ingredients are established (Section 2.1).

Contributions. We claim the following, and nothing beyond it.

1. **A measurement.** A structure-accurate learner (SPADE-scaled, AUROC 0.997–0.999) returns edge functions with a median of 14–46% of the true amplitude, depending on the cell, and the shortfall persists across four noise families, three sample sizes, a second mechanism family and d up to 500 (Section 6.1). To our knowledge this has not been quantified against ground truth for additive spline or KAN-type DAG learners; the evidence for "not done before" is absence of search hits, not proof.
2. **Metrics.** An edge-function NRMSE over true edges (a missed edge counts as an error of 1), a calibration slope, and an interventional (do-effect) NRMSE for direct and indirect pairs propagated through the learned model, together with edge-probability calibration (ECE) and band coverage (Section 3). The do-effect error follows the established idea of interventional evaluation (Gentzel et al., 2019); we do not claim it as new.
3. **A paired comparison of repairs** that includes the standard adaptive group lasso (Huang et al., 2010), an unpenalised refit, and a Bayesian estimator, with the protocol fixed by git commits before the runs (Section 5). The main finding is deflationary: the adaptive group lasso removes most of the shrinkage without changing the selected structure.
4. **Negative results.** A group-MCP learner with an independence term (SPIRE) loses structure accuracy; the cold-start Bayesian scaling variant (BASIL-S) does not converge at $d \geq 100$; full BASIL does not scale; the pre-registered BASIL-W had a numerical instability in interventional effects; BASIL-W lowers AUROC in every dataset; its credible bands under-cover; and on Sachs the repairs are less stable than the unrepaired learner (Sections 6.8, 6.10, 6.11).

What is not new. The unpenalised refit on a selected support is post-lasso least squares (Belloni and Chernozhukov, 2013). The adaptive group lasso for spline additive models is due to Huang et al. (2010). The ingredients of BASIL-W (closed-form marginal likelihoods with a g-prior, order MCMC, spline-based Bayesian DAGs, model averaging over parent sets) are due to Friedman and Koller (2003), Ni et al. (2015), Tóth et al. (2025) and others. Independence-based criteria combined with adaptive group sparsity appear in a concurrent ICML 2026 paper (Yao et al., 2026), which we know only from its abstract. Interventional evaluation is advocated by Gentzel et al. (2019). We found no prior work that combines these in the way BASIL-W does or that defines the edge-function NRMSE, but this rests on a limited search (Section 2).

Scope of causal claims. Everything here assumes an additive-noise model with causal sufficiency. We make no claim about causal validity of any learned graph or function beyond these assumptions; the heteroscedastic cell violates additivity on purpose and the real-data results are weak.

Outline. Section 2 reviews related work, Section 3 defines the problem and metrics, Section 4 the methods, Section 5 the protocol, Section 6 the results, Section 7 discusses limitations, and Section 8 gives reproducibility details.

2 Related work

Identifiability and continuous DAG learning. Nonlinear additive-noise models make the DAG identifiable (Hoyer et al., 2008; Peters et al., 2014). NOTEARS (Zheng et al., 2018) turned

structure search into continuous optimisation with a smooth acyclicity penalty; NOTEARS-MLP (Zheng et al., 2020), GraN-DAG (Lachapelle et al., 2020), GOLEM (Ng et al., 2020) and DAGMA (Bello et al., 2022) extended it to nonparametric models and better-conditioned constraints, and truncated matrix power iteration (Zhang et al., 2022) reduces its cost. Order-based methods split the problem: CAM (Bühlmann et al., 2014) searches orders under additive models and prunes with sparse regression, SCORE (Rolland et al., 2022), NoGAM (Montagna et al., 2023c) and DAS (Montagna et al., 2023b) obtain the order from score matching, and DiffAN does so with diffusion models (Sanchez et al., 2023). These works report structure metrics. Evaluation caveats are well documented: varsortability and R^2-sortability (Reisach et al., 2021, 2023), scale sensitivity of NOTEARS (Kaiser and Sipos, 2021; Seng et al., 2024), and internally standardised generators (Ormaniec et al., 2025), which we use. Montagna et al. (2023a) study robustness of score matching to assumption violations, in the spirit of our heteroscedastic cell.

Additive and spline models, and sparsity bias. Sparse additive models (Ravikumar et al., 2009) and the adaptive group lasso for spline additive models (Huang et al., 2010) select components by group penalties; the latter shows that adaptive weights restore selection consistency by reducing the bias on strong groups. Refitting after selection is classical: least squares after selection has smaller bias than the lasso (Belloni and Chernozhukov, 2013), and the adaptive lasso (Zou, 2006) was designed for the same purpose. In DAG learning, an adaptive lasso has been proposed to avoid hard thresholding that deletes small true edges (Xu et al., 2022). Neural Granger causality uses first-layer group lasso for selection (Tank et al., 2022). A concurrent ICML 2026 paper combines an independence criterion with an adaptive group lasso on first-layer MLP weights to prune constant edges under non-Gaussian, heteroscedastic noise (Yao et al., 2026); we read only its abstract, which states a focus on identifiability and structure, not on recovery of edge amplitudes. We found no study that measures how group-lasso shrinkage distorts the amplitude of recovered edge functions in additive DAG learners; accordingly we treat the plain refit and adaptive penalties as baselines.

Interpretable edge functions. Neural additive models (Agarwal et al., 2021) and KANs (Liu et al., 2025), with critiques by Yu et al. (2024) and Hou et al. (2024), promise readable univariate components. Dagma-DCE (Waxman et al., 2024) replaces weight norms by a derivative-based causal-effect strength. In time series, NAVAR (Bussmann et al., 2021) is additive, and Kuskova et al. (2026) estimate function-valued causal influence from trained NAVAR models and show that equal scalar scores can hide different shapes; in the part we read (abstract only) they do not report an accuracy metric against known functions. Concurvity can make additive components non-identifiable (Siems et al., 2023). To our knowledge no benchmark scores recovered edge functions against ground truth in cross-sectional nonlinear causal discovery. Interventional evaluation of causal models has been advocated (Gentzel et al., 2019), and recent Bayesian work reports errors of average causal effects (Tóth et al., 2025); our do-effect error follows this line.

Bayesian structure learning. Order MCMC (Friedman and Koller, 2003) samples node orders and sums over parent sets; its prior bias towards graphs compatible with many orders is analysed by Viinikka et al. (2020). Nonlinear Bayesian structure learners include Gaussian process networks with marginal-likelihood scores (Friedman and Nachman, 2000), spline-based Bayesian DAGs with edge and functional selection (Ni et al., 2015), DiBS (Lorch et al., 2021), BayesDAG (Annadani et al., 2023) and structural marginalisation with autoregressive orders for Gaussian-process additive models (Tóth et al., 2025). Wang et al. (2025) build confidence sets for causal orderings under additive errors. Our estimator BASIL-W combines a g-prior closed-form marginal likelihood on spline features with order MCMC warm-started from a continuous learner. Its ingredients are established and we do not claim the inference idea as new.

2.1 What is and is not new here

Not new: the refit, the adaptive group lasso, the Bayesian ingredients, interventional evaluation, the idea of independence plus adaptive group sparsity. Possibly new, subject to the limits of our search: the edge-function NRMSE and the study of amplitude shrinkage in spline additive DAG learners against ground truth; the particular combination BASIL-W and its warm start from a continuous learner. The literature check was performed with web search only, mostly at the level of abstracts and snippets, and absence of a hit is weak evidence.

3 Problem and metrics

Model. Data $x \in \mathbb{R}^d$ follow an additive-noise SEM $x_e = \sum_{c \in \mathrm{pa}(e)} f_{ce}(x_c) + \varepsilon_e$ with ε_e independent of $x_{\mathrm{pa}(e)}$ and a DAG A. Generation is internally standardised (iSCM, Ormaniec et al. 2025): each variable is standardised right after it is generated, so that no learner can exploit marginal variance as a causal-order cue (Reisach et al., 2021). The true edge function in standardised units is $g^*_{ce}(x) = f_{ce}(x)/s_e$, where s_e is the standard deviation of the generated (unstandardised) variable. We always compare centred curves on the observed values of the cause.

Edge-function NRMSE (primary metric). For a true edge $c \to e$ with estimated curve $\hat{g}_{ce}$ (zero if the edge is not selected),

$$\mathrm{NRMSE}_{ce} = \frac{\|\hat{g}_{ce} - g^*_{ce}\|_2}{\|g^*_{ce}\|_2},$$

evaluated on the n observed values of x_c after centring both curves. A missed edge has $\hat{g} = 0$ and an error of 1; an estimate with the right shape and half the amplitude has an error of 0.5. The dataset-level value is the mean over its true edges; the dataset is the unit of analysis. We also report the calibration slope $\langle \hat{g}, g^* \rangle / \langle g^*, g^* \rangle$ (median over edges; 1 is ideal, a slope of 0.44 means 44% of the true amplitude), and the curve R^2.

Do-effect NRMSE. For a pair (c, e) the interventional curve $\tau_{ce}(v) = \mathbb{E}[x_e \mid \mathrm{do}(x_c = v)]$ is evaluated on a 15-point grid between the 5th and 95th percentile of x_c. The truth is obtained by Monte Carlo (1000 draws) from the true SEM. The learned curve is obtained by propagating the intervention through the learned SEM in a topological order of the learned graph (source peeling on edge strength), keeping the observed residuals; 400 rows are used. The error is $\|\hat{\tau} - \tau\|/\|\tau\|$ after centring. Up to 20 *direct* (true parent) and 20 *indirect* (true ancestor, not parent) pairs are drawn per dataset; pairs whose true curve has standard deviation below 0.05 are skipped (about 3.8 of about 40 per dataset, identically for all methods). Indirect pairs test whether errors accumulate along paths.

Structure metrics. Directed AUROC over all ordered pairs against the true adjacency, AUPRC, and orientation accuracy on the true edges (1 if the score for the true direction exceeds the reversed one, 0.5 for ties). Edge scores are the standard deviation of the edge's contribution (learners) or posterior edge probabilities (Bayesian estimators).

Calibration. For the Bayesian estimators: expected calibration error (ECE, 10 bins) of edge probabilities over off-diagonal pairs; pointwise coverage of the 90% credible band of g_{ce} over true edges and rows, where a missed edge has a band concentrated at zero and therefore usually fails to cover.

4 Methods

4.1 SPADE-scaled (SSC)

SPADE (Dang et al., n.d.) represents every edge as a cubic B-spline function on a fixed grid (grid size 8 on $[-3, 3]$, 11 coefficients per edge), regresses each variable on spline functions of its candidate parents, and penalises each edge's coefficient group with a group lasso under an acyclicity constraint. The scaled variant used here (SSC) adds two changes that were fixed on an earlier generator: tree-ensemble screening to $K = 15$ candidate parents per node, and a penalty $\lambda = 0.2/d$ instead of a fixed λ, because a group penalty summed over $d(d-1)$ candidate edges over-penalises as d grows. It is trained for 400 epochs. The edge score is the standard deviation of the edge's contribution on the data. SSC is the baseline against which all repairs are measured.

4.2 Refit (SSR)

The $\lceil 1.5\,d \rceil$ highest-scoring edges of SSC define a support ("top $1.5d$"; the multiplier $k = 1.5$ was chosen on three validation datasets at $d = 100$, among $k \in \{1, 1.5, 2\}$ and uses the knowledge that the generating graphs have about d edges). The model is refit from scratch on this mask with $\lambda = 0$. This is post-lasso least squares in the sense of Belloni and Chernozhukov (2013).

4.3 Adaptive group lasso (SSA)

A second fit of SSC, on the same screened candidates and the same $\lambda = 0.2/d$, with edge-wise weights $w_{ce} = (\|\theta_{ce}\| + 0.01)^{-1}$ computed from the first SSC fit and normalised to mean 1 over the screened edges. This is the adaptive group lasso of Huang et al. (2010) with exponent $\gamma = 1$ and offset $\epsilon = 0.01$. Neither was tuned on any dataset in this paper's main grids. (A sensitivity analysis is in Section 6.6.)

4.4 BASIL-W

BASIL-W (Bayesian spline additive structure learning, warm-started) averages over parent sets and orders. Spline features of each candidate parent are whitened, and for a node i with parent set S ($|S| \le k_{\max} = 3$) the marginal likelihood is available in closed form under a Zellner g-prior with $g = n$ and a per-parent log-odds prior $\log(\pi/(1-\pi))$, $\pi = 2/(d-1)$. The candidates of each node are its top 20 parents ranked by SSC importance. Orders are sampled by Metropolis–Hastings (swap and shift moves) with the node-wise parent-set sum evaluated exactly given the order; two chains of $200d$ iterations (30% burn-in) start at the order obtained by source peeling on the SSC importance matrix, and the chain with the higher end score is kept. Output: posterior edge probabilities; model-averaged curves $\hat{g}_{ce}$ (posterior mean of the $g/(1+g)$-shrunk least-squares coefficients over the 60 highest-weight parent sets); 5–95% pointwise bands from Gaussian posterior draws; and a coefficient tensor for do-effects in which the map from whitened to spline coefficients is ridge-stabilised ($\lambda = 10^{-3}$ times the largest basis eigenvalue of the variable; Section 6.11). In all tables "BASIL-W" is this final, stabilised version unless stated. Edge-function NRMSE and band coverage use the model-averaged curves of the unstabilised map (identical to the originally pre-registered curves); the stabilised map affects do-effects only.

4.5 Other estimators studied

Full BASIL (order MCMC over all parents, no screening, feasible only up to $d \approx 50$), BASIL-S (screened candidates, cold-start chains), SPIRE (group-MCP penalty plus an HSIC residual-independence term) and GAM-ridge (a penalised additive regression without DAG constraint) appear in the negative results and on Sachs.

Table 1: Pre-registered plans and their commits. All under `research/`.

Plan	Commit	Content
`03_formulation.md`	5e971a5	SPIRE (group-MCP, independence term), $d = 10$
`04_bayes_formulation.md`	6f95e52	BASIL, $d \leq 50$
`05_bayes_scale.md`	045b134	BASIL-S scaling
`06_focus_edge_functions.md`	d5ee082	edge functions at scale, BASIL-W vs refit
`07_do_effect_robustness.md`	f8aa35f	do-effects and robustness grid
`ablation/PLAN.md`	b4626f8	BASIL-W ablations, band calibration
`replication/PLAN.md`	2164313	confirmatory replication, fresh seeds
`adaptive/PLAN.md`	91c240a	adaptive group lasso arm
`real_data/PLAN.md`	6383e6e	Sachs evaluation
`replication2/PLAN.md`	58c4b1f	independent DAGs, 20 per cell, four arms
`adaptive2/PLAN.md`	e3f6316	adaptive arm at $d = 500$, (γ, ϵ) sensitivity

5 Experimental protocol

Pre-registration by commit. Every confirmatory comparison has a plan with hypotheses, thresholds and kill criteria, committed to the git repository before the corresponding runs (Table 1). Deviations are recorded in the result READMEs and in Appendix B. The commit timestamps are those of the repository history; they are evidence of ordering, not an external registry.

Data generator. Erdős–Rényi DAGs in a random order with edge probability $2/(d-1)$ (about d edges, e.g. 83 at $d = 100$), internally standardised (iSCM), $n \in \{500, 1000, 2000\}$. Edge functions are drawn from a mechanism family: family 1 (m1) $\{0.8\tanh(1.5x),\ 0.7\sin(1.5x),\ 0.3(x^2 - 1),\ 0.8x/(1+|x|)\}$; family 2 (m2) $\{0.9x,\ \tanh(2x),\ 0.6(x^2-1),\ \text{logistic}(6(x-0.3))-0.5,\ 0.9\sin(2x)\}$. Noise: uniform$(-0.7, 0.7)$, Gaussian, Laplace (the latter two with matched standard deviation), or heteroscedastic (Gaussian noise scaled by $0.4 + 1.2|x_{\text{pa}_1}|$, which violates the additive-noise assumption).

Cells and seeds. Seeds partition into validation (used for tuning and diagnosis), earlier tests and fresh confirmatory seeds. Validation: seeds 0–9 (tuning of the early SPIRE and BASIL settings and, for the refit multiplier, seeds 0–2 at $d = 100$) and 3000–3004 (band constant κ). Earlier tests: 1000–1004 (and 1000–1029 for $d = 10$ SPIRE), on which the numerical instability of the original BASIL-W do-effects was diagnosed. Confirmatory replication: seeds 2000–2009 in cells C1–C7 and 2000–2004 in C8 (Table 2); no parameter was retuned. Ablations: test seeds 3005–3012 (uniform; 8 datasets) and 3005–3009 (Laplace, heteroscedastic; 5 each). Independent-DAG replication: 20 datasets per cell with disjoint seed sets per noise family (Section 6.5). In the replication, graphs and mechanism assignments are shared across cells with the same seed (C1–C6 use the same 10 DAGs; C7 the same DAG structures), so the cells are not independent replications.

Statistics. The dataset is the unit; comparisons are paired by dataset. We report means, 95% percentile bootstrap intervals over datasets (10 000 resamples), exact two-sided Wilcoxon signed-rank tests (the smallest attainable p is 0.002 with 10 pairs and 0.0625 with 5) and Holm adjustment over the seven $d = 100$ cells. Only the registered H1–H5 rules are confirmatory; the rest is exploratory. Pooled tests over cells overstate evidence because graphs repeat.

Compute. All experiments ran on CPU (a shared 4-core machine, one thread per job, at most two jobs in parallel) with PyTorch and NumPy, no GPU. Timings are wall-clock on a loaded

Table 2: Confirmatory replication (seeds 2000–2009; C8: 2000–2004). Generated by `make_tables.py` from `research/replication/results/all.csv`.

Cell	Setting	N	SSC	refit	BASIL-W	ratio	BASIL-W − refit [95% CI]	wins	Holm p (refit)	Holm p (SSC)
C1	d100 uniform	10	0.612	0.213	0.169	0.28	-0.043 [-0.071, -0.016]	8/10	0.082	0.014
C2	d100 Laplace	10	0.803	0.470	0.252	0.31	-0.218 [-0.249, -0.189]	10/10	0.014	0.014
C3	d100 hetero	10	0.768	0.359	0.294	0.38	-0.065 [-0.087, -0.045]	10/10	0.014	0.014
C4	d100 Gaussian	10	0.692	0.278	0.150	0.22	-0.128 [-0.156, -0.100]	10/10	0.014	0.014
C5	d100 n=500	10	0.617	0.231	0.201	0.33	-0.030 [-0.056, -0.004]	6/10	0.131	0.014
C6	d100 n=2000	10	0.611	0.199	0.152	0.25	-0.047 [-0.078, -0.017]	8/10	0.082	0.014
C7	d100 mech. 2	10	0.625	0.270	0.155	0.25	-0.115 [-0.142, -0.088]	10/10	0.014	0.014
C8	d200 uniform	5	0.612	0.203	0.173	0.28	-0.031 [-0.049, -0.011]	4/5	–	–

Edge-function NRMSE (mean over datasets; lower is better); a missed true edge counts as 1. Ratio = BASIL-W / SSC of the cell means. Difference = BASIL-W minus refit with 95% bootstrap interval over datasets. Holm: two-sided exact Wilcoxon signed-rank p, Holm-adjusted over C1–C7 (C8 has 5 datasets, minimum attainable p = 0.0625, not testable), for BASIL-W vs refit and BASIL-W vs SSC. BASIL-W is below SSC in all 75 datasets. Cells share graphs across seeds (C1–C6 use the same 10 DAGs), so they are not independent replications.

machine and are accurate to roughly ±30%.

6 Results

6.1 Structure is found, functions are not: confirmatory replication

Table 2 gives edge-function NRMSE for SSC, refit and BASIL-W on 75 datasets with fresh seeds. SSC's NRMSE is 0.61–0.80 in every cell, while its AUROC is 0.991–0.999 (Table 3): the learner finds the edges but returns curves with a median of 14–46% of the true amplitude (slope; 0.44 in C1). The refit reduces the error to 0.20–0.47 and BASIL-W to 0.15–0.29. BASIL-W has a lower NRMSE than SSC in 75 of 75 datasets, with per-dataset ratios between 0.15 and 0.42, and the cell ratio is 0.22–0.38 (all upper confidence limits ≤ 0.40). Figure 1 shows the dissociation between structure and function; Figure 2 shows the errors by cell; Figure 3 shows recovered curves on one dataset (six true edges drawn at random).

BASIL-W versus the refit. BASIL-W has a lower mean NRMSE than the refit in all seven $d = 100$ cells and the pre-registered tie criterion (BASIL-W $\leq$ refit $+0.03$) holds in 7 of 7. It is significantly better after Holm correction (p = 0.014) only in C2 (Laplace, -0.22), C3 (heteroscedastic, -0.065), C4 (Gaussian, -0.13) and C7 (mechanism family 2, -0.115). In C1, C5 and C6 (uniform noise at $n = 1000$, 500, 2000) the differences are -0.043, -0.030, -0.047, 6–8 of 10 datasets favour BASIL-W, and the supported statement is a tie within about 0.05, not superiority. The refit is fragile under heavy-tailed noise: under Laplace noise its AUROC falls to 0.908 (SSC 0.991) and its NRMSE is 0.47.

Pre-registered hypotheses. Appendix A lists the verdicts. In short: the edge-function (H1) and do-effect (H3) hypotheses were confirmed in all cells; H2 (BASIL-W within 0.03 of the refit) was confirmed; H4 (AUROC loss at most 0.03) missed its target in two cells by 0.002 and 0.001, and the coverage part of H5 failed in seven of eight cells.

6.2 Structure cost and calibration

SSC has the best structure in every cell (AUROC 0.991–0.999). The refit loses 0.016–0.083 AUROC, with the largest loss under Laplace noise. BASIL-W loses 0.006–0.032 relative to SSC (cell means $-0.025, -0.032, -0.022, -0.006, -0.020, -0.031, -0.029, -0.019$ for C1–C8); it is lower than SSC in 9 or 10 of 10 datasets in every $d = 100$ cell (Holm p = 0.014), so the loss is real, and two cells just exceed the 0.03 target. BASIL-W has the best orientation under non-uniform

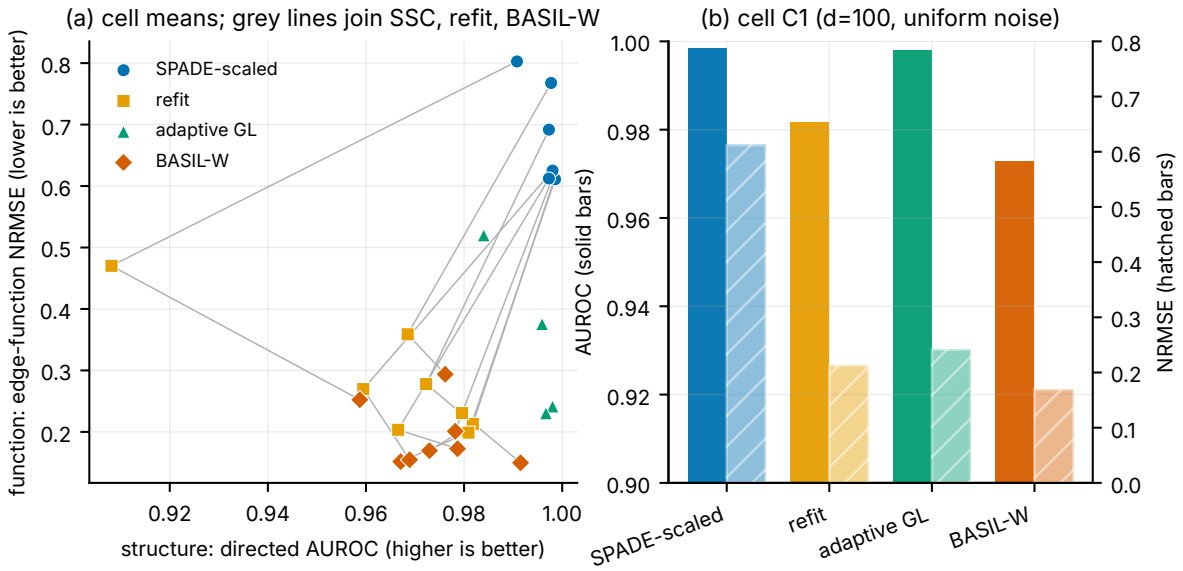


Figure 1: Structure versus function. (a) Cell means of directed AUROC (x) and edge-function NRMSE (y) for SPADE-scaled, refit, adaptive group lasso (only the four cells of the adaptive arm) and BASIL-W; grey lines join SSC, refit and BASIL-W within a cell. The learner with the best structure has the worst functions. (b) Both metrics in cell C1.

Table 3: Structure, interventional-effect error and calibration by cell (means over datasets).

Cell	AUROC SSC	refit	BASIL-W	orient. SSC	refit	BASIL-W	do direct	do indirect	cover.	ECE
C1	0.998	0.982	0.973	0.95	0.92	0.94	0.60 / 0.19 / 0.15	0.86 / 0.26 / 0.22	0.793	0.0014
C2	0.991	0.908	0.959	0.74	0.75	0.92	0.76 / 0.41 / 0.18	0.92 / 0.50 / 0.33	0.753	0.0024
C3	0.998	0.968	0.976	0.89	0.84	0.95	0.73 / 0.32 / 0.20	0.93 / 0.54 / 0.48	0.781	0.0016
C4	0.997	0.972	0.992	0.90	0.88	0.98	0.66 / 0.22 / 0.13	0.87 / 0.34 / 0.23	0.808	0.0008
C5	0.998	0.980	0.978	0.95	0.92	0.95	0.60 / 0.21 / 0.18	0.86 / 0.30 / 0.27	0.798	0.0012
C6	0.999	0.981	0.967	0.95	0.92	0.93	0.60 / 0.16 / 0.15	0.86 / 0.23 / 0.21	0.774	0.0016
C7	0.998	0.959	0.969	0.91	0.90	0.94	0.59 / 0.22 / 0.15	0.82 / 0.31 / 0.27	0.742	0.0015
C8	0.997	0.967	0.979	0.95	0.93	0.95	0.58 / 0.16 / 0.14	0.86 / 0.27 / 0.21	0.788	0.0006

Means over datasets. do-effect NRMSE for up to 20 direct and 20 indirect true pairs per dataset (SSC / refit / BASIL-W). Coverage: pointwise coverage of the 90% BASIL-W band over true edges, kappa = 1; ECE of the edge probabilities. BASIL-W AUROC is lower than SSC in 9 or 10 of 10 datasets in every $d = 100$ cell.

noise (e.g. Laplace 0.919 against 0.745 for SSC). Edge probabilities are well calibrated (ECE ≤ 0.0024). The 90% band coverage is 0.74–0.81 (Table 3; Section 6.8). The cost of BASIL-W is 1.23–1.44 times that of SSC (median wall-clock; SSC 27–31 s and BASIL-W 36–43 s at $d = 100$, $n = 1000$), that of the refit 1.47–1.70 times.

6.3 Interventional effects

Because SSC's curves are shrunken, the interventional-effect curves derived from them are wrong even for direct parents (NRMSE 0.58–0.76) and worse for indirect pairs (0.82–0.93), i.e. errors do not average out along paths but remain large. BASIL-W lowers the direct error by a factor of 3.3–5.3 relative to SSC (ratios 0.19–0.30) and the indirect error by 1.9–4.2 (ratios 0.24–0.52); heteroscedastic noise is the weakest case (indirect ratio 0.52). No dataset has an indirect BASIL-W error above 2 (0 of 75; the maximum is 0.69). Relative to the refit, BASIL-W's do-effects are lower in every cell mean but significantly so only in C2, C3, C4 and C7 for direct pairs (Holm p between 0.014 and 0.039), and only in C4 for indirect pairs (Holm 0.041); in C1, C5, C6 and C8 the two are statistically indistinguishable.

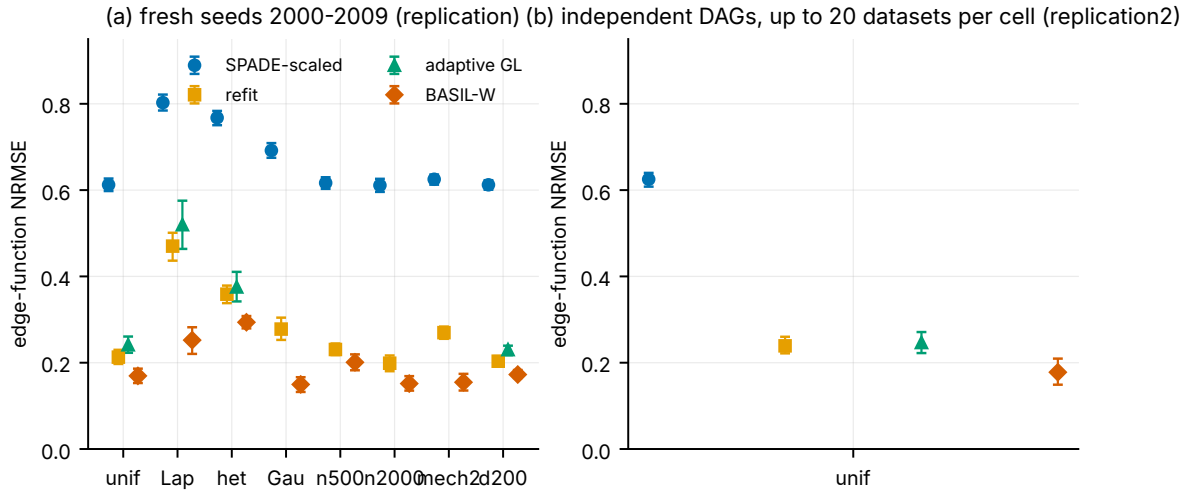


Figure 2: Edge-function NRMSE by cell, with 95% bootstrap intervals over datasets. The adaptive group lasso was run only in C1, C2, C3 and C8 and on a subset of datasets in C2, C3 and C8 (Table 4). A second panel appears when the independent-DAG replication (Section 6.5) has been run.

Table 4: Adaptive group lasso arm (SSA) on the replication seeds, with SSC, refit and BASIL-W taken from the replication runs on the same seeds.

Cell	N	SSC	SSA	refit	BASIL-W	SSA − refit	SSA − BASIL-W	p	AUROC SSA	AUROC BASIL-W
d100 uniform	10	0.612	0.241	0.213	0.169	+0.029 (8/10)	+0.072 (10/10)	0.002	0.998	0.973
d100 Laplace	5	0.805	0.520	0.470	0.261	+0.049 (5/5)	+0.258 (5/5)	0.062	0.984	0.953
d100 hetero	5	0.766	0.375	0.349	0.294	+0.027 (4/5)	+0.082 (5/5)	0.062	0.996	0.977
d200 uniform	3	0.606	0.230	0.193	0.176	+0.037 (3/3)	+0.055 (3/3)	0.250	0.997	0.977

Adaptive group lasso (SSA: weights $(\|\theta\| + 0.01)^{-1}$, same $\lambda = 0.2/d$, γ and ϵ not tuned) on the replication seeds; SSC, refit and BASIL-W values are the replication runs on the same seeds. Differences SSA minus comparator, in parentheses the number of datasets in which SSA is worse. Wilcoxon p (uncorrected) for SSA vs BASIL-W; with 5 or 3 datasets the minimum attainable p is 0.0625 or 0.25.

6.4 The standard fix: adaptive group lasso

Before the adaptive arm was run we predicted that SSA would land between SSC and the refit (NRMSE 0.3–0.5). It did better: at $d = 100$ with uniform noise SSA has NRMSE 0.241 (slope 0.90), the same AUROC as SSC (0.998; orientation 0.950), and it is worse than BASIL-W by 0.072 (10 of 10 datasets, p = 0.002) and worse than the refit by 0.029 (8 of 10, p = 0.037). The SSA values at $d = 200$ (0.230 against BASIL-W 0.176; three datasets), under heteroscedastic noise (0.375 against 0.294) and Laplace noise (0.520 against 0.261) show the same ordering (Table 4). Read plainly: *the standard adaptive group lasso closes about 85% of the NRMSE gap between SPADE-scaled and BASIL-W at no structural cost*, and it is the only repair that preserves SSC's AUROC (BASIL-W loses 0.01–0.03, the refit more). BASIL-W's remaining advantage is small under uniform noise (0.055–0.072) and large under heavy tails (0.26), where the adaptive lasso is also much worse than at light tails. A practitioner who wants accurate curves and the best structure should therefore use the adaptive group lasso unless heavy-tailed noise or edge probabilities matter. The SSA runs were smaller than the replication (10, 5, 5 and 3 datasets); γ and ϵ were not tuned, and a tuned adaptive lasso could narrow the gap further.

6.5 Independent-DAG replication

The first replication uses 10 datasets per cell and shares graphs between cells. A second pre-registered replication with 20 datasets per cell, independent graphs per noise family and all four

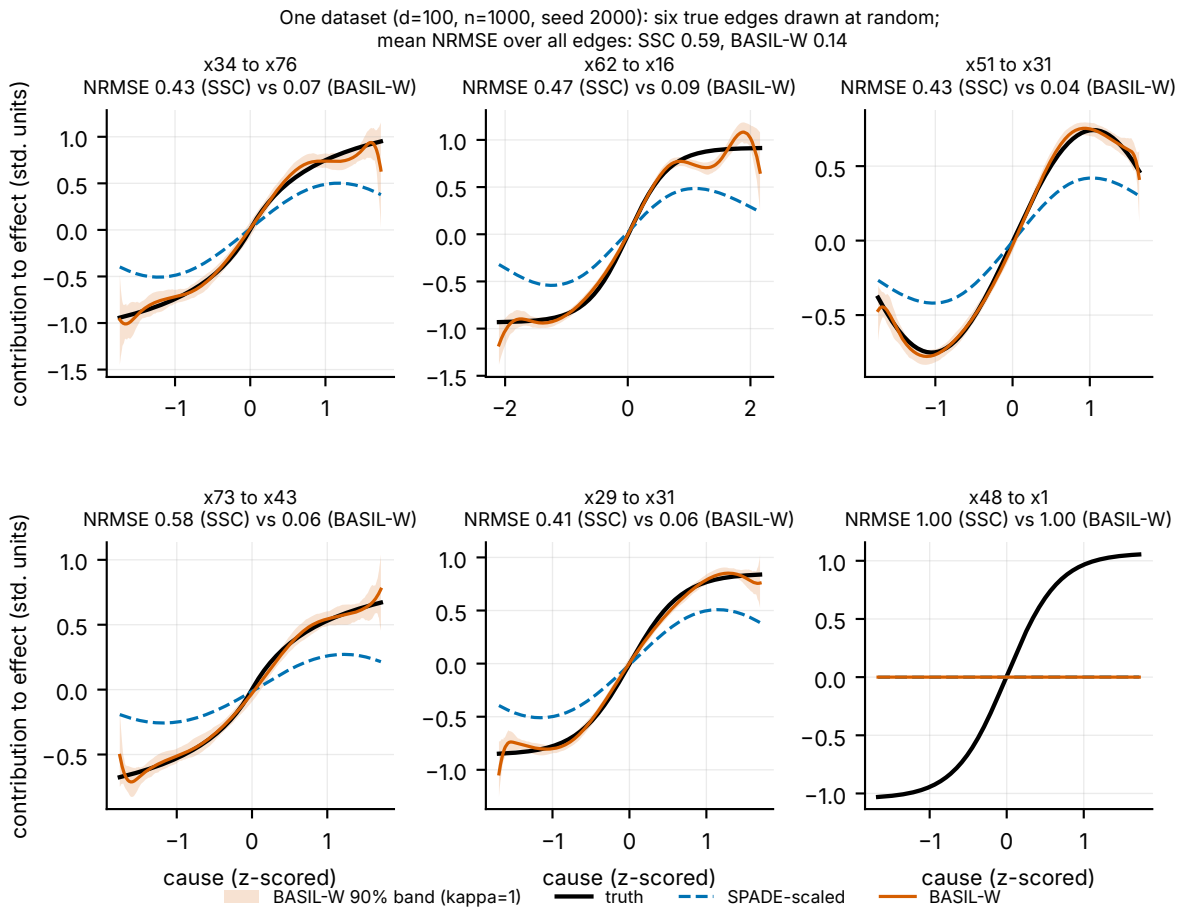


Figure 3: Recovered curves on one dataset ($d = 100$, $n = 1000$, uniform noise, seed 2000). Black: truth; dashed blue: SPADE-scaled; orange: BASIL-W with its 90% band ($\kappa = 1$). The six edges were drawn at random, not selected on any result; the figure illustrates the amplitude shrinkage and, in the last panel, an edge missed by both methods (NRMSE 1); it is not evidence beyond the tables. Data: `data/example_curves.npz`.

arms (SSC, SSA, refit, BASIL-W) is run in `research/replication2`. Table 5 is generated from its results.

Status. **PENDING.** At build time 5 of 60 datasets had all four arms; no conclusion is drawn from the partial table. Seeds: uniform 3000–3019, Laplace 3100–3119, heteroscedastic 3200–3219. The uniform seeds 3000–3012 coincide with the ablation validation and test datasets of Sections 6.7 and 6.8.

6.6 Adaptive arm at $d = 500$ and sensitivity to γ and ϵ

The adaptive arm was run only up to $d = 200$ in the main grid. A pre-registered extension (`research/adaptive2`) runs it at $d = 500$ (two datasets) and over a 3×3 grid of (γ, ϵ) at $d = 100$ (five datasets) to test whether the gap to BASIL-W is an artefact of the untuned defaults.

Status. **PENDING.** At build time 2 dataset files of the adaptive2 experiment were available; no conclusion is drawn from partial tables.

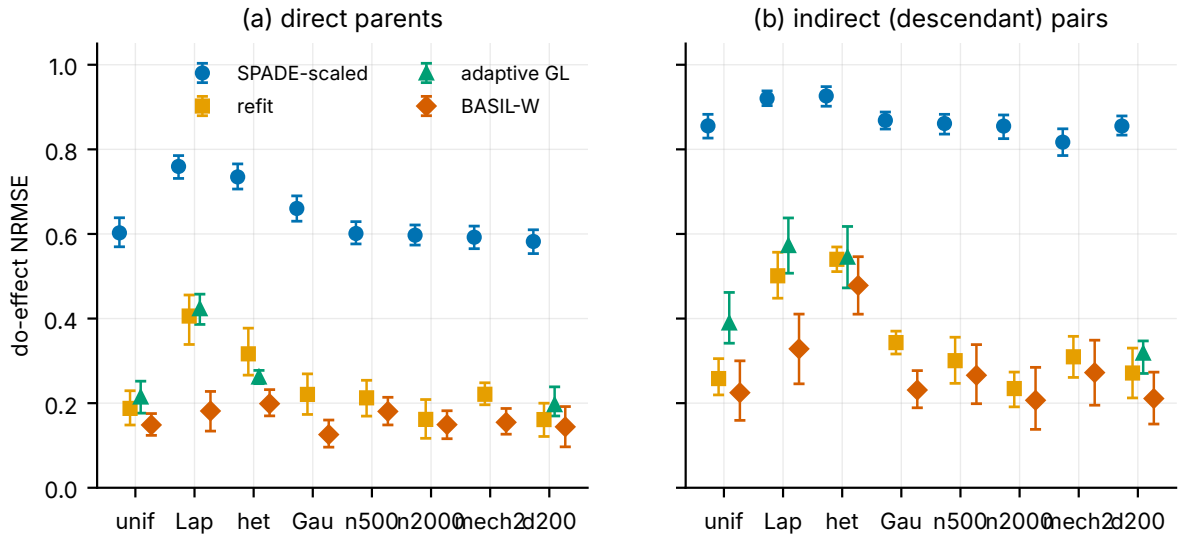


Figure 4: Do-effect NRMSE for direct parents (a) and indirect (descendant) pairs (b), mean and 95% bootstrap interval over datasets, by cell. SPADE-scaled's effects are wrong even for direct parents; the repaired models are much better, and refit and BASIL-W are close.

Table 5: Independent-DAG replication (research/replication2).

Noise	N	SSC	SSA	refit	BASIL-W	BASIL-W − SSA [95% CI]	wins	p	BASIL-W − refit	BASIL-W<SSC
uniform	5	0.611	0.237	0.236	0.170	-0.067 [-0.097, -0.040]	5/5	0.0625	-0.067 (5/5)	5/5

Independent-DAG replication (`research/replication2`): complete datasets only (all four arms present), edge-function NRMSE, mean over datasets. BASIL-W − SSA: mean paired difference with 95% bootstrap interval, number of datasets in which BASIL-W is lower, uncorrected exact two-sided Wilcoxon p (the plan's Holm-adjusted results are in research/replication2/results/analysis.md). BASIL-W − refit: mean difference (wins). Last column: datasets where BASIL-W < SSC. The uniform seeds 3000–3012 coincide with the ablation datasets.

6.7 Ablations

Table 8 summarises the ablations. The warm start from SSC's order is essential: a cold start raises NRMSE from 0.177 to 0.324 and lowers orientation from 0.943 to 0.809 (8 of 8 datasets worse), because cold chains do not converge in $200d$ iterations (end-score gaps of hundreds of nats); longer cold chains were not run, so this is a statement about this chain length. The source of the candidate set does not matter at $d = 100$ (candidate recall is 1.000 with either ranking), and the prior scale g and inclusion prior π are robust ($|\Delta\text{NRMSE}| \leq 0.002$). Capping the parent set at $k_{\max} = 2$ is harmful (+0.103 NRMSE, 8 of 8 worse; with mean degree 2 a non-trivial share of nodes have three or more parents). Four chains of $600d$ iterations change NRMSE by -0.004 and indirect do-effect NRMSE from 0.248 to 0.227, but the chain end-score gap does not shrink (31 nats against 8.8), so the chains are not provably converged; the default is adequate for edge-function NRMSE and not demonstrably so for indirect effects. Variants that keep the warm start all look alike, so BASIL-W's output here is largely determined by SSC's order and candidates plus local refinement; what happens when SSC's order is poor was not tested. Three registered predictions were wrong (the size of the warm-start effect, the effect of $k_{\max} = 2$ and chain convergence).

6.8 Credible bands

On five validation datasets the bands at $\kappa = 1$ cover 0.802 of the truth pointwise (nominal 0.90); only 11% of the curves lie entirely inside the band. The diagnosis is that 72% of the shortfall

Table 6: Independent-DAG replication: structure, do-effects, calibration and cost.

Noise	AUROC	do direct	do indirect	cover. (BASIL-W)	ECE	cost ratio
uniform	0.997 / 0.997 / 0.974 / 0.971	0.589 / 0.201 / 0.167 / 0.148	0.846 / 0.342 / 0.309 / 0.217	0.795	0.001	1.68 / 1.65 / 1.34

Means over complete datasets (SSC / SSA / refit / BASIL-W). Cost: median over datasets of the per-dataset cost ratio to SSC (SSA / refit / BASIL-W), excluding metric code, shared loaded machine.

Table 7: Adaptive arm at $d = 500$ and (γ, ϵ) sensitivity (research/adaptive2).

(b) (γ, ϵ) grid, $d = 100$, uniform, seeds 2000–2001.

γ	ϵ	N	NRMSE	slope	AUROC
0.5	0.001	2	0.196	0.92	0.999
0.5	0.01	2	0.282	0.83	0.998
0.5	0.1	2	0.333	0.80	0.999
1	0.001	2	0.187	0.92	0.999
1	0.01	2	0.200	0.92	0.999
1	0.1	2	0.301	0.82	0.997
2	0.001	2	0.195	0.93	0.999
2	0.01	2	0.188	0.93	0.999
2	0.1	2	0.219	0.92	0.999

Reference on the same seeds (replication): SSC 0.592, refit 0.226, BASIL-W 0.164. The default $(1, 0.01)$ is the configuration used for all headline numbers; the grid is a sensitivity analysis and no setting was selected.

comes from the 8% of true edges the model does not find ($P \leq 0.9$): their band is a spike of width 0.03 around zero while the truth is not zero. For found edges the shortfall is small (0.87 against 0.90), z-scores are centred (mean -0.004, sd 1.03), and the noise variance, shrinkage and spline-approximation error are ruled out as main causes. We therefore tried a single remedy, posterior-variance inflation $m + \kappa(D - m)$. The smallest κ with validation coverage ≥ 0.90 is $\kappa^* = 1.55$ (frozen), which gives test coverage 0.894, 0.904 and 0.908 for uniform, Laplace and heteroscedastic noise with bands 1.55 times wider (Table 9). This is average validity obtained partly for the wrong reason: found edges are over-covered (0.96–0.98 instead of 0.90) while missed edges remain uncovered (0.11–0.36), and the whole-curve (simultaneous) coverage is only 0.61 (uniform). The per-dataset coverage ranges from 0.78 to 0.93 for the uniform test datasets at κ^* because the share of missed edges was 16% on test and 8% on validation; κ^* was somewhat lucky and about 1.7–2.0 would have been needed on the test sets to reach 0.90. We conclude that edge probabilities (ECE ≤ 0.0024) are calibrated, curve bands are not conditionally valid, and that the honest remedy for missed edges is a better structure estimate. Split-conformal and bootstrap alternatives were not implemented.

6.9 Semi-synthetic benchmark from Sachs

Real data have no function ground truth. A semi-synthetic design fits a model to the Sachs data and simulates from the fitted SEM, so that edge functions are known while the graph and the functional shapes are of empirical origin (`research/semisyn`).

Status. PENDING. At build time 0 semi-synthetic datasets were available; no conclusion is drawn.

Table 8: BASIL-W ablations: one change at a time ($d = 100$, $n = 1000$, uniform noise, 8 test datasets).

Variant	NRMSE	Δ	orient.	Δ	AUROC	do indirect	cover.	gap	time
BASIL-W (reference)	0.177	–	0.943	–	0.971	0.248	0.798	8.8	10.8
candidates by marginal R^2	0.176	-0.001	0.943	+0.000	0.972	0.251	0.798	17.8	10.6
cold start (random order)	0.324	+0.147	0.809	-0.133	0.909	0.548	0.678	543.0	9.6
cold start + R^2 candidates (BASIL-S)	0.318	+0.141	0.821	-0.121	0.921	0.593	0.697	575.9	10.0
$g = n/4$	0.176	-0.001	0.945	+0.002	0.972	0.251	0.801	15.7	10.3
$g = 4n$	0.176	-0.001	0.942	-0.000	0.974	0.253	0.799	65.6	10.7
$\pi \times 0.5$	0.177	-0.000	0.943	+0.000	0.972	0.248	0.798	7.5	10.0
$\pi \times 2$	0.176	-0.002	0.945	+0.002	0.973	0.251	0.800	17.1	10.3
$k_{max} = 2$	0.280	+0.103	0.894	-0.048	0.951	0.422	0.706	85.4	6.9
4 chains, $600d$ iterations	0.173	-0.004	0.934	-0.009	0.974	0.227	0.807	30.9	23.5

d=100, n=1000, uniform noise, 8 test datasets (seeds 3005–3012), one change at a time. Δ = paired mean difference to the reference. End-score gap: max−min over chains of the mean log-score at the end of the chains (nats); time: BASIL fit only, 1 core, seconds. No significance tests.

Table 9: Band coverage before and after variance inflation, test datasets.

Noise (datasets)	κ	all edges	found	missed	whole curve	mean width
uniform (8)	1	0.798	0.877	0.095	0.15	0.140
uniform (8)	1.55	0.894	0.981	0.112	0.61	0.216
Laplace (5)	1	0.796	0.850	0.207	0.05	0.141
Laplace (5)	1.55	0.904	0.964	0.249	0.32	0.219
hetero (5)	1	0.790	0.835	0.304	0.03	0.174
hetero (5)	1.55	0.908	0.960	0.357	0.23	0.269

Pointwise coverage of the 90% band (5th/95th percentile of $m + \kappa(D - m)$ for posterior draws D and mean m) over true edges, mean over datasets (found/missed: pooled over edges). $\kappa^* = 1.55$ was chosen as the smallest value reaching coverage 0.90 on 5 validation datasets (seeds 3000–3004) and frozen. 'found' = posterior inclusion $P > 0.9$; 'missed' = $P \leq 0.9$; 'whole curve' = share of curves entirely inside the band.

6.10 Real data: Sachs

On the Sachs flow-cytometry data (7466 cells, $d = 11$, natural log then z-score; 10 subsamples of 2000 cells; 18 consensus edges, Sachs et al. 2005) no repair improves structure (Table 11, Figure 6). AUROC is 0.613 for SSC, 0.595 for the refit, 0.563 for BASIL-W and 0.544 for full BASIL; orientation is about 0.5 for every method. SSC places 5.8 true edges in its top 18 on average, against about 2.9 expected at chance. Relative to SSC the refit passes the pre-registered "no loss" rule (−0.017); BASIL-W (−0.050) and full BASIL (−0.069) lose more than 0.03, and SSC beats linear NOTEARS by 0.047 AUROC. Function stability across subsamples on a common set of 24 edges is 0.98 for SSC, 0.54 for BASIL-W and 0.49 for the refit; the difference is selection instability: the refit and BASIL-W return a zero curve for about 35% of (edge, subsample) cells, SSC never does, and when an edge is kept in both subsamples all methods are stable (R^2_{aff} 0.96–0.98). By the pre-registered rule the refit and BASIL-W are therefore "less stable" than SSC. The amplitude of the repaired curves relative to SSC is 1.60 (refit) and 1.41 (BASIL-W), i.e. the shrinkage predicted by the simulations is present but smaller than the factor of about 2.3 that the synthetic slope would imply, and there is no ground truth to say which amplitude is right. Sign sanity checks against three textbook relations were uninformative or unsupportive. This is a negative result for using the repairs as-is on real data. High stability of SSC reflects in part that it is a smooth always-on fit; stability is not correctness and not evidence of causal meaning (only two of the six top SSC edges are consensus edges in the consensus direction).

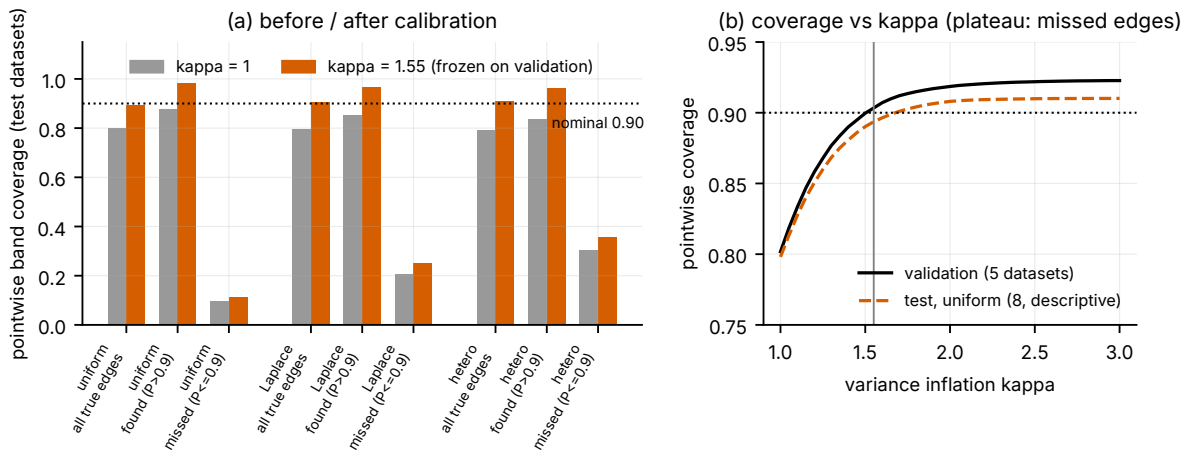


Figure 5: Coverage of 90% bands before ($\kappa = 1$) and after ($\kappa = 1.55$, frozen on validation) calibration. (a) By noise family and by whether the edge was found; (b) coverage as a function of κ on validation and, for description only, on the uniform test datasets.

Table 10: Semi-synthetic Sachs benchmark (research/semisyn).

PENDING: data not yet available when this PDF was built; the script fills this table from `research/semisyn/results` when it exists.

6.11 Negative results

Table 12 collects the attempts that did not work. Three deserve a sentence each.

SPIRE. The first idea of the project was a single objective: a group-MCP penalty, which has no shrinkage on strong edges by construction, plus a residual-independence (HSIC) term to exploit the ANM identifiability signal. At $d = 10$ with 30 test datasets it lost 0.021 AUROC against SPADE and reached a slope of 0.75 (kill line 0.80) while the old adaptive heuristic reached 0.93 without an AUROC loss; the HSIC term added at most 0.05 orientation and was not significant on validation. The suspected reason is that exact zeros from the proximal step discard ranking information that SPADE's dense soft fit keeps; this is a hypothesis, and a convergence-budget test did not change the result. The independence-plus-adaptive-group-sparsity idea is also pursued by Yao et al. (2026).

BASIL-S and full BASIL. Full BASIL took about 11 minutes per dataset at $d = 50$. The screened variant BASIL-S was 57 times faster at $d = 50$ and passed its faithfulness criterion, but with random starts its two chains disagreed by hundreds to thousands of nats at $d \geq 100$, orientation collapsed at $d = 200$ (0.830 against 0.942 for SPADE-scaled), and at $d = 500$ (one dataset) orientation was 0.714 and the slope 0.51. An amended version (greedy initialisation, $3\times$ longer chains, chain selection) was developed on validation seeds and recovered orientation but not AUROC (still 0.02–0.03 below) and was no faster than SPADE-scaled at $d = 200$. SPADE-scaled itself already scales (AUROC 0.997–0.999 at $d = 100$, 200, 500; 0.7–9 minutes per dataset), so scalability is not a differentiator for BASIL. The solution that works (BASIL-W) starts from SPADE-scaled's order, which makes it a refinement of the learner, not an independent estimator.

Numerical instability of the pre-registered do-effects. Four of 45 pre-registered BASIL-W datasets gave indirect do-effect NRMSE far above 1 (up to 185). The cause, diagnosed on one case, was coefficients up to 1.4×10^7 in the whitened-to-spline coefficient map along weakly excited spline directions, which makes propagated interventions leave the data support.

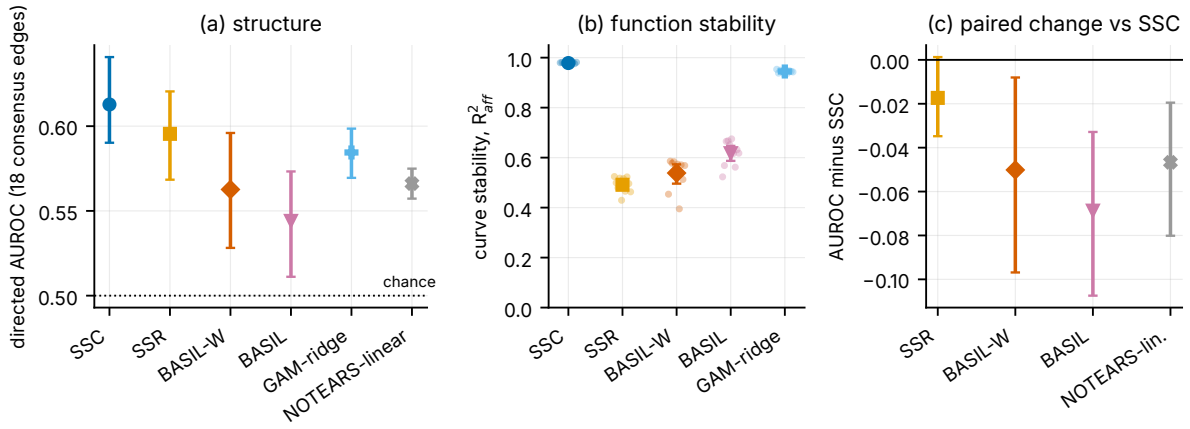


Figure 6: Sachs data ($d = 11$, 10 overlapping subsamples of 2000 cells). (a) Directed AUROC against the 18 consensus edges; (b) stability of edge curves across subsamples on a common edge set (an unselected edge counts as zero); (c) paired AUROC change relative to SPADE-scaled. Intervals are bootstrap over subsamples and optimistic.

Table 11: Sachs: structure and function stability (10 subsamples).

Method	AUROC [95% CI]	AUPRC	skel. AUROC	orient.	hits in top 18	stability
SSC (SPADE-scaled)	0.613 [0.590, 0.641]	0.291	0.690	0.51	5.8	0.98
refit	0.595 [0.568, 0.621]	0.266	0.688	0.53	6.1	0.49
BASIL-W	0.563 [0.528, 0.596]	0.248	0.703	0.58	5.8	0.54
BASIL (full)	0.544 [0.511, 0.573]	0.227	0.683	0.51	5.3	0.62
GAM-ridge	0.584 [0.570, 0.599]	0.287	0.735	0.40	6.1	0.94
NOTEARS-linear	0.566 [0.557, 0.575]	0.239	0.634	0.53	5.0	–
DAGMA-linear	0.435 [0.416, 0.450]	0.168	0.688	0.31	3.0	–
var-sortnregress (z-scored)	0.503 [0.460, 0.545]	0.207	0.664	0.44	3.3	–

Sachs, $d = 11$, 10 subsamples of 2000 cells (overlapping, so intervals are optimistic), 18 consensus edges (contested; chance AUPRC 0.164, about 2.9 hits at chance). Stability: mean R^2_{aff} of the edge curves across subsamples on the 24 edges that are in SSC's top 18 in at least 3 subsamples; an unselected edge counts as a zero curve ($R^2 = 0$), which is what drives the low values for refit and BASIL-W.

A ridge-stabilised map removed it (0 of 75 datasets above NRMSE 2 on fresh seeds; Section 6.3). The stabilisation was chosen after seeing test results, with a single value of its constant, and confirmed on fresh seeds.

Other. SCORE and NoGAM are 0.07–0.11 AUROC below SSC at $d = 10$ and 5–10 times slower; the GAM-ridge baseline without DAG constraint has similar skeleton AUROC to SPADE but orientation 0.29 lower (0.65 against 0.95), so the DAG constraint matters for orientation, not for the skeleton.

7 Discussion and limitations

What the evidence supports. (i) Structure-accurate sparse spline learners can return edge functions with less than half of the true amplitude at d up to 500, across noise families, sample sizes and two mechanism families, and this carries over to interventional effects. (ii) The cheap fixes work: the adaptive group lasso removes most of the error without changing the selected structure, and the refit removes about two thirds of it at a structural cost. (iii) A Bayesian model-averaged estimator warm-started from the learner's order removes somewhat more, is

Table 12: Negative and failed results kept in the paper.

Attempt	Setting	Outcome	Verdict
SPIRE (group-MCP + HSIC term)	$d = 10$, $n = 1000$, 30 datasets	AUROC -0.021 $[-0.031, -0.010]$ vs SPADE; slope 0.75 (kill line 0.80); HSIC term adds $+0.05$ orientation at best, not significant on validation	H1 fails, H2 inconclusive
BASIL-S cold start	$d = 100$–500, 5 datasets (1 at $d = 500$)	chain end-scores differ by hundreds of nats; AUROC -0.02 to -0.03 vs SPADE-scaled; orientation 0.83 vs 0.94 at $d = 200$ (original); $d = 500$: orientation 0.71, slope 0.51	does not scale as specified
BASIL-S, cold start (ablation)	$d = 100$, 8 datasets	NRMSE 0.324 vs 0.177, orientation 0.809 vs 0.943 (8/8 worse)	warm start essential
Full BASIL	$d = 50$	about 11 min per dataset; no better than BASIL-W on Sachs (AUROC 0.544)	not scalable
SCORE / NoGAM	$d = 10$, 10 datasets	AUROC 0.858 / 0.895 vs 0.980 (SPADE), 5–10× slower	baseline only
Pre-registered BASIL-W do-effects	$d \geq 100$, 4 of 45 datasets	indirect do-effect NRMSE up to 185 (coefficients up to 1.4×10^7); fixed post hoc by a ridge map	instability; fixed, 0/75 on fresh seeds

Numbers from research/spire (README_results, README_basil, README_scale, README_do), research/ablation and research/real_data.

more robust to heavy tails and heteroscedasticity than the refit, and supplies calibrated edge probabilities, at the price of AUROC and a more complex pipeline. We do not recommend BASIL-W over the adaptive group lasso as a default.

Limitations (complete list).

1. Simulation is the only place where function ground truth exists; the real-data evidence is negative or ambiguous, and the semi-synthetic benchmark (Section 6.9) inherits the assumptions of the fitted model.
2. Ten datasets per cell in the first replication, with cells C1–C6 sharing the same 10 DAGs, so pooled p-values overstate the evidence; the independent-DAG replication has 20 datasets per cell and three noise families only.
3. A single generator family (iSCM with Erdős–Rényi graphs of expected degree 2, two mechanism families, four noise types); no other graph densities, scale-free graphs, non-additive mechanisms, latent confounding or measurement error; mechanism functions are smooth and low-order.
4. $d = 500$ rests on two datasets and, in the first grid, on the BASIL-W version before stabilisation; the adaptive arm at $d = 500$ is also two datasets (Section 6.6).
5. The ridge stabilisation of BASIL-W's do-effects was chosen after seeing test results with one value of its constant; it was confirmed on fresh seeds (0 of 75 explosions) but never tuned.
6. The adaptive group lasso used a single untuned setting of γ and ϵ in the main grid, and was run on 3–10 datasets per cell; the sensitivity study is small (five datasets, no significance claims).
7. The novelty of the repairs is limited (Section 2.1); the literature check relied on web search and abstract-level reading. The concurrent ICML 2026 paper (Yao et al., 2026) was read via

its abstract only; Kuskova et al. (2026) likewise.

8. Credible bands are valid only on average: the calibration constant κ^* was chosen on five validation datasets and was somewhat lucky; found edges are over-covered, missed edges remain uncovered; simultaneous coverage is low.

9. BASIL-W inherits its candidate set and its starting order from SPADE-scaled; if SPADE-scaled's order is poor, BASIL-W's behaviour is untested. Chains are not provably converged: four chains do not agree better than two.

10. BASIL-W's AUROC is below SPADE-scaled's in essentially every dataset (0.006–0.032 on average) and two cells miss the pre-registered 0.03 target by 0.001–0.002.

11. The Sachs consensus graph is contested, the data pool interventional conditions that the methods do not use, $d = 11$ with 18 edges makes 0.05 AUPRC about one edge, the 10 subsamples overlap by about 27% (intervals optimistic), and there is no ground truth for the functions. The three sign-sanity relations were taken from memory of the standard cascade and not verified against the original text.

12. Order MCMC has a prior bias towards graphs compatible with many orders (Viinikka et al., 2020), which we do not correct; the Gaussian likelihood and $k_{\max} = 3$ limit BASIL-W; model errors, not sampler errors, dominate in some datasets (the true order scored 25–46 nats below the MCMC order on an early validation dataset).

13. The refit multiplier $k = 1.5$ was tuned on three validation datasets and exploits that the generating graphs have mean degree 2; a user may not know the density. Refit and adaptive baselines were given the screened candidates and $\lambda = 0.2/d$ of SPADE-scaled, whose constants were fixed on an earlier generator.

14. The BASIL-W ablations are on 8 datasets without significance tests, and three registered predictions were wrong.

15. Cost ratios were measured on a shared, loaded machine and may not transfer; the 4-core CPU timings exclude metric code.

16. Some of the independent-DAG replication's uniform datasets (seeds 3000–3012) coincide with the seeds used for the band-calibration and ablation work at $d = 100$ (validation 3000–3004, test 3005–3012); no BASIL-W setting was changed by that work, but those datasets are not untouched (Section 6.5).

17. Do-effect evaluation covers single-node hard interventions on a 15-point grid and at most 20 direct and 20 indirect pairs per dataset; pairs with tiny true effects are skipped (about 10% of pairs, identical across methods).

Risks of misreading. The largest NRMSE reductions are relative to a learner (SPADE-scaled with $\lambda = 0.2/d$) that is deliberately sparse; a less sparse baseline would shrink less. Our result is about the shape bias of sparse group-penalised fits, not about any specific software.

8 Conclusion

Finding the edges is not enough: on iSCM data a screened group-lasso spline learner has near-perfect structure but returns curves with about 44% of the true amplitude, and its interventional effects are wrong even for direct parents. Standard repairs work. The adaptive group lasso gets most of the way without hurting structure; a refit gets two thirds of the way at a structural cost and breaks down under heavy-tailed noise; a warm-started Bayesian model average goes a little further, is more robust, and adds calibrated edge probabilities, but costs AUROC, has

under-covering bands and, on the one real dataset we could test, is less stable than the unrepaired learner. Reporting edge-function error next to structure metrics costs little and changes the ranking of methods. The evidence is simulation-based with one generator family and small cell sizes; the real-data evidence is negative.

Reproducibility statement

Code and data. All code, plans, raw per-dataset CSVs and analysis scripts are in the git repository, under `research/` (repository location and release commit: [**to be inserted by the authors at release**]). Datasets are generated from seeds by `bench.gen_full`; the Sachs data are in `data/sachs/` (7466 cells, 11 variables, consensus graph with 18 edges). **Regenerating this paper.** From `research/paper/ms/`: `python3.13 make_example_curves.py` (about two minutes, one core), `python3.13 make_figures.py`, `python3.13 make_tables.py`, then `pdflatex main; bibtex main; pdflatex main; pdflatex main`. **Re-running the experiments.** Each experiment directory has a job list and runner: for example `research/replication/run_all.sh` followed by `python3.13 aggregate.py`; the replication of 75 datasets takes several hours on 2 jobs of a 4-core CPU. **Seeds.** Validation 0–9 and 3000–3004; earlier tests 1000–1004 and 1000–1029 ($d = 10$); confirmatory 2000–2009 (C8: 2000–2004); ablation tests 3005–3012; Sachs subsamples seeds 0–9 (`RandomState(r).choice(7466, 2000)`); method seed 0 everywhere. One bit-identical re-run check on two datasets confirmed that the replication code reproduces the earlier numbers. **Hardware and software.** CPU only, a shared 4-core machine (no GPU), one thread per job, at most two parallel jobs; Python 3.13, PyTorch, NumPy, scikit-learn, SciPy. Timings are noisy.

Declarations

Author contributions. [**To be completed by the authors, e.g. following the CRediT taxonomy.**]

Competing interests. [**To be completed by the authors.**]

Funding. [**To be completed by the authors.**]

Data availability. [**To be completed by the authors. Synthetic data are generated by the released code from stated seeds; the Sachs data are a public benchmark (source and licence to be stated).**]

Use of AI assistance. [**Placeholder to be reviewed and adapted by the authors to the target venue's policy. Facts: an AI assistant (Claude, Anthropic) was used to write code, run experiments, analyse results and draft text, including the literature search and verification notes and this manuscript. The authors are responsible for the content and must verify all numbers and references.**]

References

Rishabh Agarwal, Levi Melnick, Nicholas Frosst, Xuezhou Zhang, Ben Lengerich, Rich Caruana, and Geoffrey E. Hinton. Neural additive models: interpretable machine learning with neural nets. In *Advances in Neural Information Processing Systems 34*, 2021.

Yashas Annadani, Nick Pawlowski, Joel Jennings, Stefan Bauer, Cheng Zhang, and Wenbo Gong. BayesDAG: gradient-based posterior inference for causal discovery. In *Advances in Neural Information Processing Systems 36*, 2023.

Kevin Bello, Bryon Aragam, and Pradeep Ravikumar. DAGMA: learning DAGs via M-matrices and a log-determinant acyclicity characterization. In *Advances in Neural Information Processing Systems 35*, 2022.

Alexandre Belloni and Victor Chernozhukov. Least squares after model selection in high-dimensional sparse models. *Bernoulli*, 19(2):521–547, 2013.

Peter Bühlmann, Jonas Peters, and Jan Ernest. CAM: causal additive models, high-dimensional order search and penalized regression. *Annals of Statistics*, 42(6):2526–2556, 2014.

Bart Bussmann, Jannes Nys, and Steven Latré. Neural additive vector autoregression models for causal discovery in time series. In *Discovery Science*, volume 12986 of *LNCS*, pages 446–460, 2021.

Quang-Vinh Dang, Dat Le, and Minh Ngoc Dinh. SPADE: spline additive-noise DAG estimation for interpretable nonlinear causal discovery in managerial decision support. *Array*, n.d. Volume, pages and year to be completed.

Nir Friedman and Daphne Koller. Being Bayesian about network structure: a Bayesian approach to structure discovery in Bayesian networks. *Machine Learning*, 50:95–125, 2003.

Nir Friedman and Iftach Nachman. Gaussian process networks. In *Proceedings of the 16th Conference on Uncertainty in Artificial Intelligence*, 2000.

Amanda Gentzel, Dan Garant, and David Jensen. The case for evaluating causal models using interventional measures and empirical data. In *Advances in Neural Information Processing Systems 32*, 2019.

Yuntian Hou, Di Zhang, Jinheng Wu, and Xiaohang Feng. Kolmogorov–Arnold networks: a critical assessment of claims, performance, and practical viability. arXiv preprint arXiv:2407.11075, 2024.

Patrik O. Hoyer, Dominik Janzing, Joris M. Mooij, Jonas Peters, and Bernhard Schölkopf. Nonlinear causal discovery with additive noise models. In *Advances in Neural Information Processing Systems 21*, pages 689–696, 2008.

Jian Huang, Joel L. Horowitz, and Fengrong Wei. Variable selection in nonparametric additive models. *Annals of Statistics*, 38(4):2282–2313, 2010.

Marcus Kaiser and Maksim Sipos. Unsuitability of NOTEARS for causal graph discovery when dealing with dimensional quantities. *Neural Processing Letters*, 2021. doi: 10.1007/s11063-021-10694-5.

Kuskova, Zaytsev, and Coppedge. Function-valued causal influence in nonlinear time series. In *Proceedings of the 43rd International Conference on Machine Learning*, volume 306 of *PMLR*, 2026. Read via the abstract page only.

Sébastien Lachapelle, Philippe Brouillard, Tristan Deleu, and Simon Lacoste-Julien. Gradient-based neural DAG learning. In *International Conference on Learning Representations*, 2020.

Ziming Liu, Yixuan Wang, Sachin Vaidya, Fabian Ruehle, James Halverson, Marin Soljačić, Thomas Y. Hou, and Max Tegmark. KAN: Kolmogorov–Arnold networks. In *International Conference on Learning Representations*, 2025.

Lars Lorch, Jonas Rothfuss, Bernhard Schölkopf, and Andreas Krause. DiBS: differentiable Bayesian structure learning. In *Advances in Neural Information Processing Systems 34*, pages 24111–24123, 2021.

Francesco Montagna, Atalanti A. Mastakouri, Elias Eulig, Nicoletta Noceti, Lorenzo Rosasco, Dominik Janzing, Bryon Aragam, and Francesco Locatello. Assumption violations in causal discovery and the robustness of score matching. In *Advances in Neural Information Processing Systems 36*, 2023a.

Francesco Montagna, Nicoletta Noceti, Lorenzo Rosasco, Kun Zhang, and Francesco Locatello. Scalable causal discovery with score matching. In *Proceedings of the Second Conference on Causal Learning and Reasoning*, volume 213 of *PMLR*, pages 752–771, 2023b.

Francesco Montagna, Nicoletta Noceti, Lorenzo Rosasco, Kun Zhang, and Francesco Locatello. Causal discovery with score matching on additive models with arbitrary noise. In *Proceedings of the Second Conference on Causal Learning and Reasoning*, volume 213 of *PMLR*, 2023c.

Ignavier Ng, AmirEmad Ghassami, and Kun Zhang. On the role of sparsity and DAG constraints for learning linear DAGs. In *Advances in Neural Information Processing Systems 33*, 2020.

Yang Ni, Francesco C. Stingo, and Veerabhadran Baladandayuthapani. Bayesian nonlinear model selection for gene regulatory networks. *Biometrics*, 71(3):585–595, 2015.

Weronika Ormaniec, Scott Sussex, Lars Lorch, Bernhard Schölkopf, and Andreas Krause. Standardizing structural causal models. In *International Conference on Learning Representations*, 2025.

Jonas Peters, Joris M. Mooij, Dominik Janzing, and Bernhard Schölkopf. Causal discovery with continuous additive noise models. *Journal of Machine Learning Research*, 15:2009–2053, 2014.

Pradeep Ravikumar, John Lafferty, Han Liu, and Larry Wasserman. Sparse additive models. *Journal of the Royal Statistical Society: Series B*, 71(5):1009–1030, 2009.

Alexander G. Reisach, Christof Seiler, and Sebastian Weichwald. Beware of the simulated DAG! Causal discovery benchmarks may be easy to game. In *Advances in Neural Information Processing Systems 34*, 2021.

Alexander G. Reisach, Myriam Tami, Christof Seiler, Antoine Chambaz, and Sebastian Weichwald. A scale-invariant sorting criterion to find a causal order in additive noise models. In *Advances in Neural Information Processing Systems 36*, 2023.

Paul Rolland, Volkan Cevher, Matthäus Kleindessner, Chris Russell, Dominik Janzing, Bernhard Schölkopf, and Francesco Locatello. Score matching enables causal discovery of nonlinear additive noise models. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *PMLR*, 2022.

Karen Sachs, Omar Perez, Dana Pe'er, Douglas A. Lauffenburger, and Garry P. Nolan. Causal protein-signaling networks derived from multiparameter single-cell data. *Science*, 308(5721): 523–529, 2005.

Pedro Sanchez, Xiao Liu, Alison Q. O'Neil, and Sotirios A. Tsaftaris. Diffusion models for causal discovery via topological ordering. In *International Conference on Learning Representations*, 2023.

Jonas Seng, Matej Zecevic, Devendra Singh Dhami, and Kristian Kersting. Learning large DAGs is harder than you think: many losses are minimal for the wrong DAG. In *International Conference on Learning Representations*, 2024.

Julien Siems, Konstantin Ditschuneit, Winfried Ripken, Alma Lindborg, Maximilian Schambach, Johannes S. Otterbach, and Martin Genzel. Curve your enthusiasm: concurvity regularization in differentiable generalized additive models. In *Advances in Neural Information Processing Systems 36*, 2023.

Alex Tank, Ian Covert, Nicholas Foti, Ali Shojaie, and Emily B. Fox. Neural Granger causality. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(8):4267–4279, 2022.

Christian Tóth, Christian Knoll, Franz Pernkopf, and Robert Peharz. Effective Bayesian causal inference via structural marginalisation and autoregressive orders. In *Proceedings of the 28th International Conference on Artificial Intelligence and Statistics*, volume 258 of *PMLR*, pages 4240–4248, 2025.

Jussi Viinikka, Antti Hyttinen, Johan Pensar, and Mikko Koivisto. Towards scalable Bayesian learning of causal DAGs. In *Advances in Neural Information Processing Systems 33*, 2020.

Y. Samuel Wang, Mladen Kolar, and Mathias Drton. Confidence sets for causal orderings. *Journal of the American Statistical Association*, 2025. doi: 10.1080/01621459.2025.2542552.

Daniel Waxman, Kurt Butler, and Petar M. Djurić. Dagma-DCE: interpretable, non-parametric differentiable causal discovery. *IEEE Open Journal of Signal Processing*, 5:393–401, 2024.

Danru Xu, Erdun Gao, Wei Huang, Andy Song, and Mingming Gong. On the sparse DAG structure learning based on adaptive lasso. arXiv preprint arXiv:2209.02946, 2022.

Ruicong Yao, Tim Verdonck, Mihaela van der Schaar, and Jakob Raymaekers. Identifiable nonlinear differentiable causal discovery via independence and adaptive group sparsity. In *Proceedings of the 43rd International Conference on Machine Learning*, 2026. Read via the poster abstract only.

Runpeng Yu, Weihao Yu, and Xinchao Wang. KAN or MLP: a fairer comparison. arXiv preprint arXiv:2407.16674, 2024.

Zhen Zhang, Ignavier Ng, Dong Gong, Yuhang Liu, Ehsan Abbasnejad, Mingming Gong, Kun Zhang, and Javen Qinfeng Shi. Truncated matrix power iteration for differentiable DAG learning. In *Advances in Neural Information Processing Systems 35*, 2022.

Xun Zheng, Bryon Aragam, Pradeep Ravikumar, and Eric P. Xing. DAGs with NO TEARS: continuous optimization for structure learning. In *Advances in Neural Information Processing Systems 31*, 2018.

Xun Zheng, Chen Dan, Bryon Aragam, Pradeep Ravikumar, and Eric P. Xing. Learning sparse nonparametric DAGs. In *Proceedings of the 23rd International Conference on Artificial Intelligence and Statistics*, volume 108 of *PMLR*, pages 3414–3425, 2020.

Hui Zou. The adaptive lasso and its oracle properties. *Journal of the American Statistical Association*, 101:1418–1429, 2006.

A Pre-registered hypotheses and verdicts (confirmatory replication)

B Deviations from the plans

- *BASIL-S.* Chains were amended after test diagnostics (greedy start, longer chains, chain selection), tried on three validation seeds, then both configurations were run on test seeds.

Table 13: Verdicts against `research/replication/PLAN.md` (thresholds copied from the plan).

Hypothesis	Verdict	Evidence
H1: NRMSE ratio BASIL-W/SSC ≤ 0.70, every cell; kill ≥ 0.90	confirmed (8/8)	ratios 0.22–0.38, upper CI ≤ 0.40
H2: BASIL-W $\leq$ refit $+0.03$ in ≥ 5 of 7 cells	confirmed (7/7)	lower in all 7 means; Holm-significant in 4; tie in C1, C5, C6
H3: do-effect ratio ≤ 0.70 (direct, indirect), no indirect error > 2	confirmed	direct 0.19–0.30, indirect 0.24–0.52; 0 of 75 above 2
H4: AUROC BASIL-W $-$ SSC ≥ -0.03 in every cell; kill < -0.05	not confirmed; kill not reached	C2 -0.032, C6 -0.031 miss; 6 of 8 pass
H5: coverage ≥ 0.80 and ECE ≤ 0.10	ECE yes; coverage not confirmed	coverage 0.74–0.81, below 0.80 in 7 of 8 cells; ECE ≤ 0.0024

- *Do-effects.* The ridge-stabilised coefficient map was chosen after seeing test results and re-run only on the cells that had exploded; the replication is its first clean test.
- *Replication.* Timing columns changed (cost excludes metric code); results of two datasets re-run and bit-identical to the earlier files.
- *Sachs.* Same subsamples and seed as earlier non-registered runs (disclosed in the plan); one variance-sorting baseline on the pre-z-score scale was added outside the plan; a multi-threading problem forced a restart pinned to one core.
- *SPIRE.* Several solver details deviate from the formulation document (reduced basis size, restricted HSIC gradient, step schedule, tie-breaking, fixed σ); an early validation run with a larger penalty constant was overwritten and is not reported.
- *Ablations.* Validation datasets turned out to be easier than test datasets (fewer missed edges), which affects the calibration constant.